DATA SHEET

FULLPRO
FULLERPROFESSIONAL

APPEARANCE® ADMIRE™

Sealer

PRODUCT DESCRIPTION:

Appearance® Admire™ is a versatile sealer formulated with a unique blend of acrylic and urethane polymers. **Appearance® Admire™** quickly seals porous surfaces and provides a beautiful high-gloss shine. It can be used in a variety of maintenance programs and is responsive when burnished at low or high speeds.

FEATURES:

Versatile:
Simplifies floor care by providing effective sealing of porous/old floors and providing an above average gloss with a single product.

Repairable:
It will stand up to high speed burnishing and frequent detergent scrubbing.

Clear Film:
Dries to a clear film and is specifically formulated to not yellow over time.

Exceptional Gloss:
Improved urethane formula provides "finish"-like gloss and depth compared to traditional sealer/finish formulas.

PRODUCT SPECIFICATIONS:

pH	8.6 ± 0.2
Appearance	Opaque White Emulsion
Fragrance	Polymeric
Freezing Point	About 32°F
% Non-Volatile Solids	19.5 ± 0.5
% Total Solids	25.4
Solubility in Water	Complete
Flash Point	> 212°F
Coverage	1700 to 2000 sq. ft. per gallon

(may vary due to differences in porosity of the surface)

Slip Resistance: Static coefficient of friction (James Machine) meets or exceeds 0.5 as determined by ASTM D2047-82.

INGREDIENTS:

Water	7732-18-5
Styrene acrylate copolymer	25085-34-1
Diethylene glycol monoethyl ether	111-90-0
Maleic anhydryde adduct of polypropylene	25722-45-6
Tri-butoxyethyl phosphate	78-51-3

END-USE-RATING



0	1	2	3	4
Minimal	Slight	Moderate	Serious	Severe
Minimo	Minimo	Moderar	Grave	Drastico

PRODUCT AVAILABILITY:

- 9861 .....4/1 gal.
- 9865 .....1/5 gal. pail
- 98655 .....1/55 gal. drum

APPEARANCE® ADMIRE™ Sealer

Use Information: Before applying **Appearance® Admire™** remove old finish and sealer from floor using appropriate Fullpro stripper and following label directions. Can be used on terrazzo, quarry tile, brick, unglazed ceramic, Mexican tile, slate, unpolished marble and all types of resilient flooring.

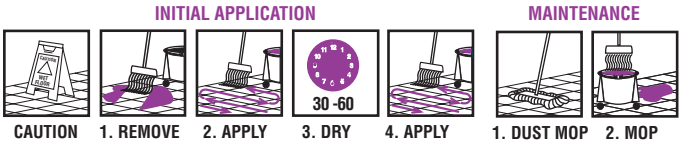

DIRECTIONS FOR USE:

INITIAL APPLICATION

1. **REMOVE** old sealer/finish following label directions using an appropriate Fullpro stripper.
2. **APPLY** a thin coat of Appearance® Admire™ using a clean FullPro finish mop.
3. **DRY:** Allow 30-60 minutes drying time.
4. **APPLY** 3-4 additional coats. For best results allow adequate drying time between coats.

MAINTENANCE

1. **DUST MOP** the floor using a FullPro dry mop. Remove gum, labels and other attached soils with a long-handled scraper or putty knife.
2. **DAMP MOP OR AUTOSCRUB** using a Fullpro cleaner or maintainer, following the label directions.

WARNING
May cause mild eye and skin irritation. Harmful to aquatic life.

Prevention
Avoid release to the environment.

Response
Wash hands after handling.

Storage
Store away from incompatible materials.

Disposal
Dispose of contents/container in accordance with local / regional / national / international regulations.

KEEP OUT OF REACH OF CHILDREN

PERSONAL PROTECTION:

Respiratory Protection: Not needed under normal conditions.
Ventilation: Use with adequate ventilation.
Eye Protection: Safety glasses are optional.
Protective Gloves: Protective gloves are optional.
Other Protective Clothing or Equipment: Wear clothing as necessary to prevent skin contact.

TRANSPORTATION INFORMATION:

U.S. DOT - Proper Shipping Name:
Not regulated by DOT.
Marine Pollutant: No.

Fuller Commercial Products
One Fuller Way
Great Bend, KS 67530
United States
CHEMTREC (800) 424-9300
Emergency (620) 792-1711
24 hour Emergency (800) 424-9300
www.fullercommercial.com

986TDS-0615

DATA SHEET

FULLPRO
FULLER PROFESSIONAL